





## Assembly Instruction


### Special Features:

- Length: 270, 300, 350, 400, 450, 500, 550mm.
- Exterior height of drawer side wall is 120mm.
- Full extension drawer system with loading capacity 35kg.
- Quick installation and removal of drawer.
- Two dimensional adjustment on drawer front.

| Basic length | Internally usable drawer depth (NL-26) | Minimum installation depth of drawer | Minimum installation height |
|--------------|----------------------------------------|--------------------------------------|-----------------------------|
| 270mm        | 244mm                                  | 270mm                                | 145mm                       |
| 300mm        | 274mm                                  | 300mm                                | 145mm                       |
| 350mm        | 324mm                                  | 350mm                                | 145mm                       |
| 400mm        | 374mm                                  | 400mm                                | 145mm                       |
| 450mm        | 424mm                                  | 450mm                                | 145mm                       |
| 500mm        | 474mm                                  | 500mm                                | 145mm                       |
| 550mm        | 524mm                                  | 550mm                                | 145mm                       |




### Drawer front assembly




### Front panel removing

- Install drawer front




### Front panel removing


- Take out the plastic cover




- Loosen the fastening screws
- Turn the screw driver to remove the drawer front




Up & down (height) adjustment: ±2mm




Left & right (side) adjustment: ±1mm




Left & right (side) adjustment: ±1mm




### Back Adjustment




### Drawer back assembly






### Drawer bottom assembly




### Drawer front assembly



### Bottom panel drilling

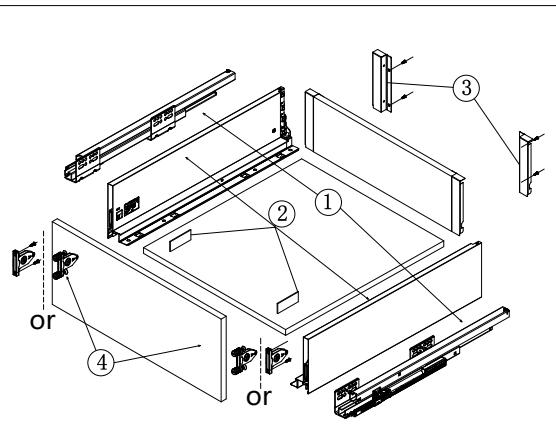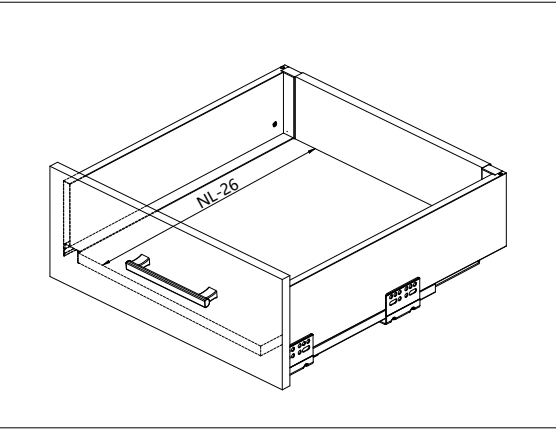


### Technology pivot: Bottom and Back Panel Measurement 16MM Density Panel






- Bottom panel width=Inside Cabinet Width(LW)-75±0.5  
Bottom panel length=Runner length(NL)-10MM
- Back panel height= 100MM  
Back panel width=Inside Cabinet Width(LW)-87±0.5

### Runner Installation(mm)



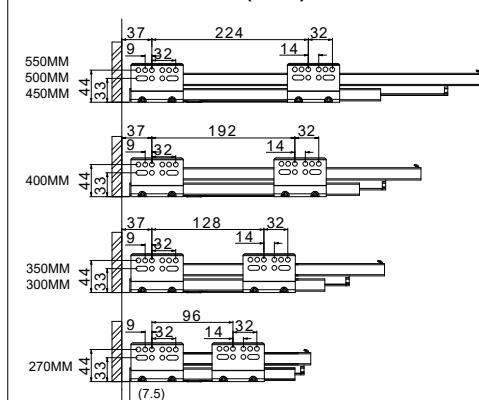


Basic length(NL): 270/300/350/400/450/500/550mm

### Drawer installation



Drawer closed very silent with integrated soft close damper



### Drawer removal

