
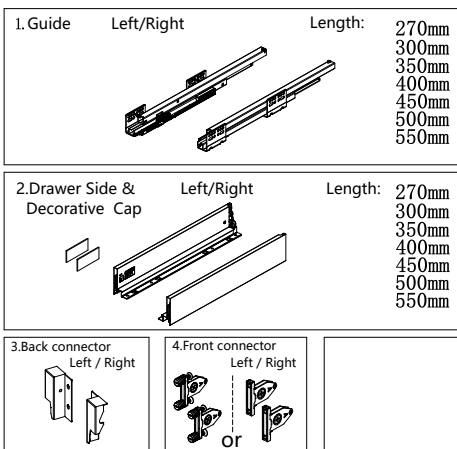
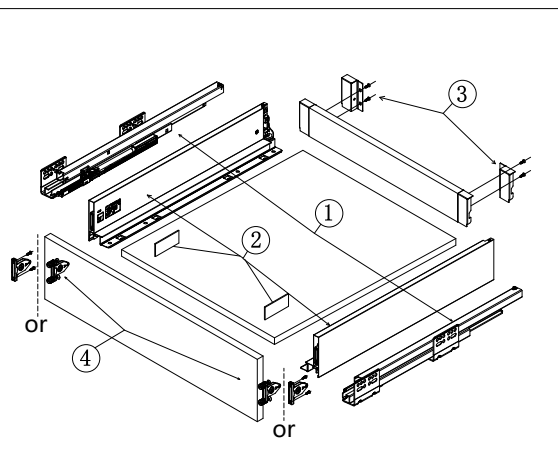


Assembly Instruction


Special Features:

- Length: 270, 300, 350, 400, 450, 500, 550mm.
- Exterior height of drawer side wall is 88mm.
- Full extension drawer system with loading capacity 35kg.
- Quick installation and removal of drawer.
- Two dimensional adjustment on drawer front.

Basic length	Internally usable drawer depth (NL-26)	Minimum installation depth of drawer	Minimum installation height
270mm	244mm	270mm	113mm
300mm	274mm	300mm	113mm
350mm	324mm	350mm	113mm
400mm	374mm	400mm	113mm
450mm	424mm	450mm	113mm
500mm	474mm	500mm	113mm
550mm	524mm	550mm	113mm

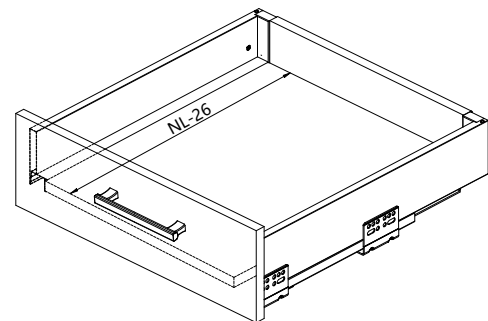


Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel







LW: Inside Cabinet Width

- Bottom panel width=Inside Cabinet Width(LW)-75±0.5
Bottom panel length=Runner length(NL)-10MM
- Back panel height= 68MM
Back panel width=Inside Cabinet Width(LW)-87±0.5



Runner Installation(mm)

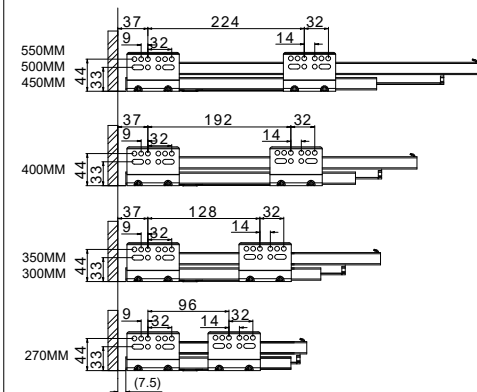



Basic length(NL): 270/300/350/400/450/500/550mm




Drawer front assembly






Front panel removing




Up & down (height) adjustment: ±2mm




Left & right (side) adjustment: ±1mm





Drawer back assembly






Drawer bottom assembly




Drawer front assembly



Drawer installation



Drawer removal



Drawer closed very silent with integrated soft close damper

